


MINIMESS®-1604 Test Points

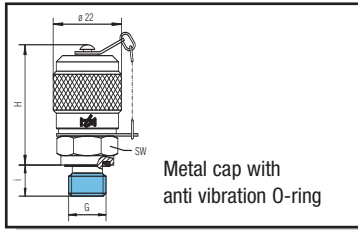

Thread G	Type of sealing A	Torque in Nm	Technical data				Part-number with NBR - sealing
			p max	H in mm	i in mm	SW in mm	
M 10 x 1	Form G	12	40 MPa	43	8,5	17	2106-01-33.00
M 14 x 1,5	Form F	40		40	10	19	2106-01-14.00
ISO 228-G 1/4		40		40	10	19	2106-01-18.00



Material: Free cutting steel 1.0718		Material: Stainless steel 1.4571	
Metal cap		Metal cap	
Part-number with NBR - sealing		Part-number with NBR - sealing	
on request		on request	
2106-01-18.10		2706-01-18.10	

Option

For FKM (Viton) Exchange end digits from 00 to 10	10
---	-----------

MINIMESS®-plug-in Test Points

Internal Ball Sealing

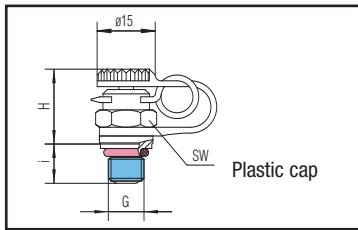

Thread G	Type of sealing A	Torque in Nm	Technical data				Part-number with FKM - sealing
			p max	H in mm	i in mm	SW in mm	
M 8 x 1	Form G	6	40 MPa	17,5	8,5	12	2104-30-32.00
M 10 x 1		12		17,5	8,5	12	2104-30-33.00
ISO 7/ I-R 1/8	Suitable sealant	–		17,5	8,5	12	2104-30-40.00
1/8 NPT		–		17,5	8,5	12	2104-30-43.00

Material: Free cutting steel 1.0718		Material: Stainless steel 1.4571	
Metal cap		Metal cap	
Part-number with FKM - sealing		Part-number with FKM - sealing	
on request		on request	
2704-30-32.10		2704-30-32.10	
on request		on request	
on request		on request	

HYDROTECHNIK GmbH
Holzheimer Straße 94–96 | 65549 Limburg
Tel. 0 64 31.40 04-0 | Fax 0 64 31.4 53 08
www.hydrotechnik.com | info@hydrotechnik.com

