

## BALL JOINT FITTING



- ▶ Fitted to a suction cup to avoid bending stress.
- ▶ Non-leaking design to work with Vacuum Check Valve and Vacustat.
- ▶ Available in a loose-fit, a locking version or one with 5° movement.

### TECHNICAL DATA



| Description       | Unit | Value             |
|-------------------|------|-------------------|
| Material          |      | SS, Zn, CuZn, NBR |
| Temperature range | °C   | -30-70            |
| Weight            | g    | 348-393           |

### TECHNICAL DATA, SPECIFIC

| Description      | Unit | 0110636 | Value<br>0121177 | 0110635 |
|------------------|------|---------|------------------|---------|
| Angular movement | °    | —       | ±5               | ±20     |

### ORDERING INFORMATION

|   | Description                                | PMAT No. | Art. No. |
|---|--|----------|----------|
| A | Ball joint fitting G3/8", loose            | X7016    | 0110635  |
| A | Ball joint fitting G3/8", locking          | X7018    | 0110636  |
| B | Ball joint fitting G3/8", limited movement | X7026    | 0121177  |

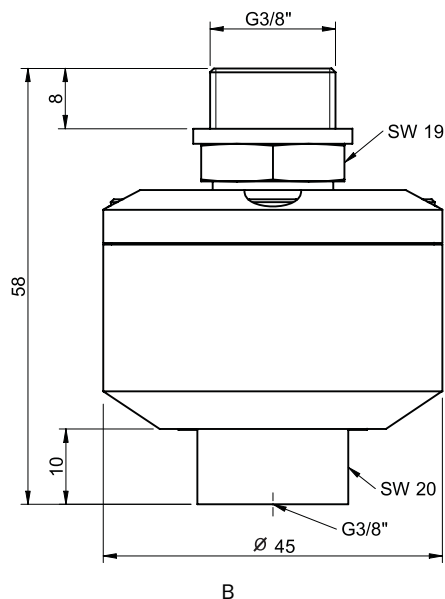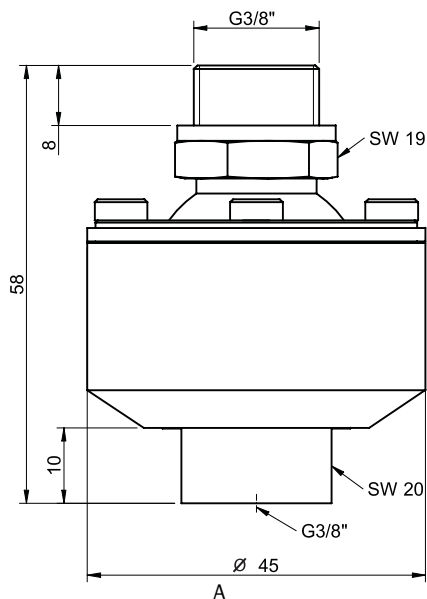

### ORDERING INFORMATION, ACCESSORIES

| Description                                | Art. No. |
|--|----------|
| Adapter fitting G3/8" male x 3/8" NPT male | 0121240  |