

MOUNTING BAR - ADJUSTABLE



- ▶ Locks into straight 90° or adjustable to $\pm 20^\circ$.
- ▶ Positive lock position.
- ▶ Rigid mounting with low deflection.
- ▶ 100-600 mm lengths.

TECHNICAL DATA

Description	Unit	Value
Material		Al
Temperature range	°C	-30-70



TECHNICAL DATA, SPECIFIC

Description	Unit	0109248	0109249	Value 0109250	0109251	0109253
Linear deflection	mm	0.2 (at 400 N)	0.4 (at 400 N)	1 (at 350 N)	3 (at 300 N)	6.5 (at 200 N)
Torsional twist at 130 Nm	°	1	1.2	1.6	2.5	4.6
Weight	g	568	619	670	772	1078

Operational lifetime: 10,000,000 cycles at max. load

ORDERING INFORMATION

Description	PMAT No.	Art. No.
Adjustable mounting bar L=100	X4040	0109248
Adjustable mounting bar L=150	X4015	0109249
Adjustable mounting bar L=200	X4045	0109250
Adjustable mounting bar L=300	X4020	0109251
Adjustable mounting bar L=600	X4030	0109253

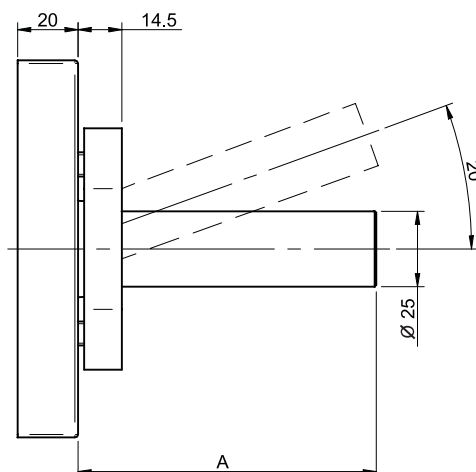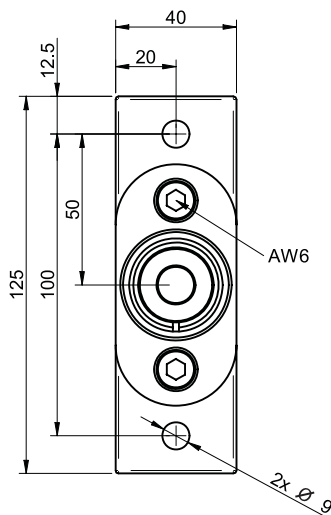

DIMENSIONS

Description	A mm
Adjustable mounting bar L=100	100
Adjustable mounting bar L=150	150
Adjustable mounting bar L=200	200
Adjustable mounting bar L=300	300
Adjustable mounting bar L=600	600