


I/O NODE



- Enlargement for the PLC
- Offers up to 14 analogue outputs

TECHNICAL DATA

Description	Unit	Value
Material		Fe, CuZn, PS
Temperature range	°C	0–50
Weight	g	2600–3000
Power supply	VDC	24
Safety classification		IP65
Power consumption	W	9–45
Analogue outputs	pcs	2–14
Control voltage range	V	0–10

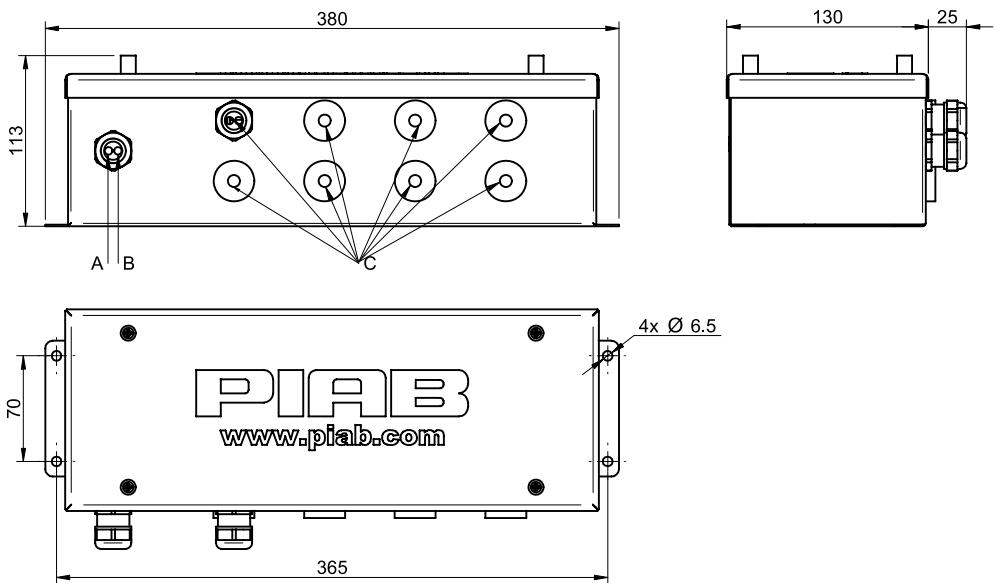

A	Data I/O from PLC unit
B	Power supply 24VDC
C	Analogue output signal(s) to regulators