OPTIMISING CONTROLS PVBS 3




PLC





- ▶ Up to 8 pumps can be connected
- ► Interface to the printing press and to all other system components
- ▶ Open for many different inputs

TECHNICAL DATA

Description	Unit	Value
Material		Al, CuZn, PS
Temperature range	°C	0–50
Weight	g	27300
Power supply	VDC	24
Safety classification		IP65
Power consumption	W	35–38
Analogue outputs	pcs	8
Control voltage range	V	0–10

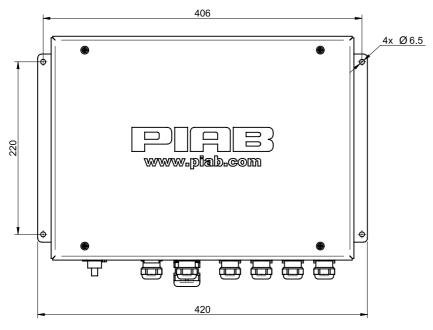





A Data output to operator terminals

OPTIMISING CONTROLS PVBS 3



- B Data out to I/O node
 C Power supply 24VDC to I/O node
 D Analogue output to regulators
 E Power supply 24VDC input

- F Data input from printing press (Arcnet)
 G Power supply 24VDC to operator terminals
 H Control input from printing press (parallel)
- Ground screw